


TPA-001060G01

典型的应用领域





- 生物医学
- 宽带发射
- 功率放大
- 实验测试

外形尺寸

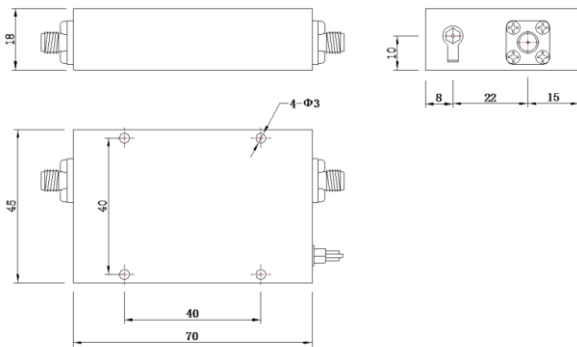

XB-11 UNIT: mm

测试曲线 (Temp @+25°C)

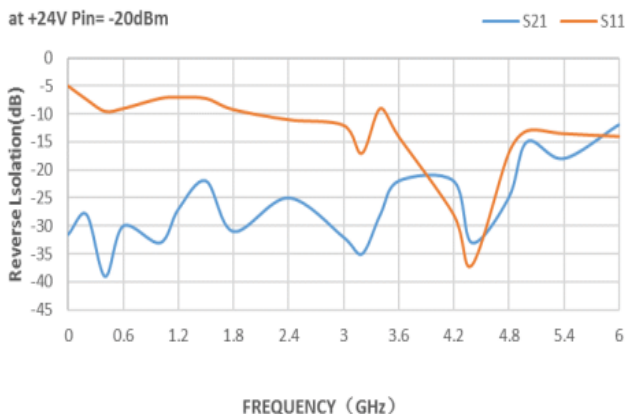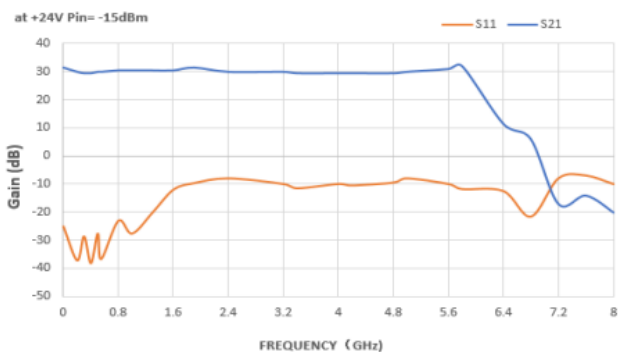


■ 频率范围	0.1~6.0GHz
■ 增益	28.0dB
■ P1dB	30.0dBm typ

技术指标@25°C

频率范围	0.1~6.0GHz
增益	28.0dB
增益平坦度	±2.5dB typ
P1dB	30.0dBm typ
OIP3	41.0dBm
输入驻波比	2.5:1
输出驻波比	2.0:1
电压	24.0V
电流	800mA@P3dB
工作温度	-40°C~+70°C
储存温度	-55°C~+120°C
极限电压	26.0V
最大入口功率	+10dBm
结构尺寸	70mm×45mm×18mm

订单描述

TPA-001060G01 指标特性

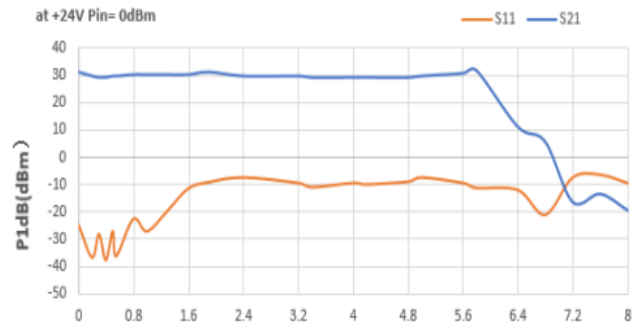

Transmit Output Power /ACPR

